

Industrijska i garažna sekciona vrata

motori za kapije
i parking rampe



EURO-MIMF
industrijska i garažna vrata

Vanjske boje i završne obrade


Glatki



C21



RAL 9006



RAL 7016

Stucco C21




Stucco C81




Stucco C17




Stucco RAL 6005



Stucco RAL 9006



Stucco RAL 7016



Stucco / Woodgrain

Woodgrain C21




Woodgrain C81



Woodgrain C17



Woodgrain RAL 6005



Zlatni hrast




Orah



Zelena


Dekor drveta Ultra Touch

Dekor drveta Rigatino



S kasetama

Garažna sekciona vrata

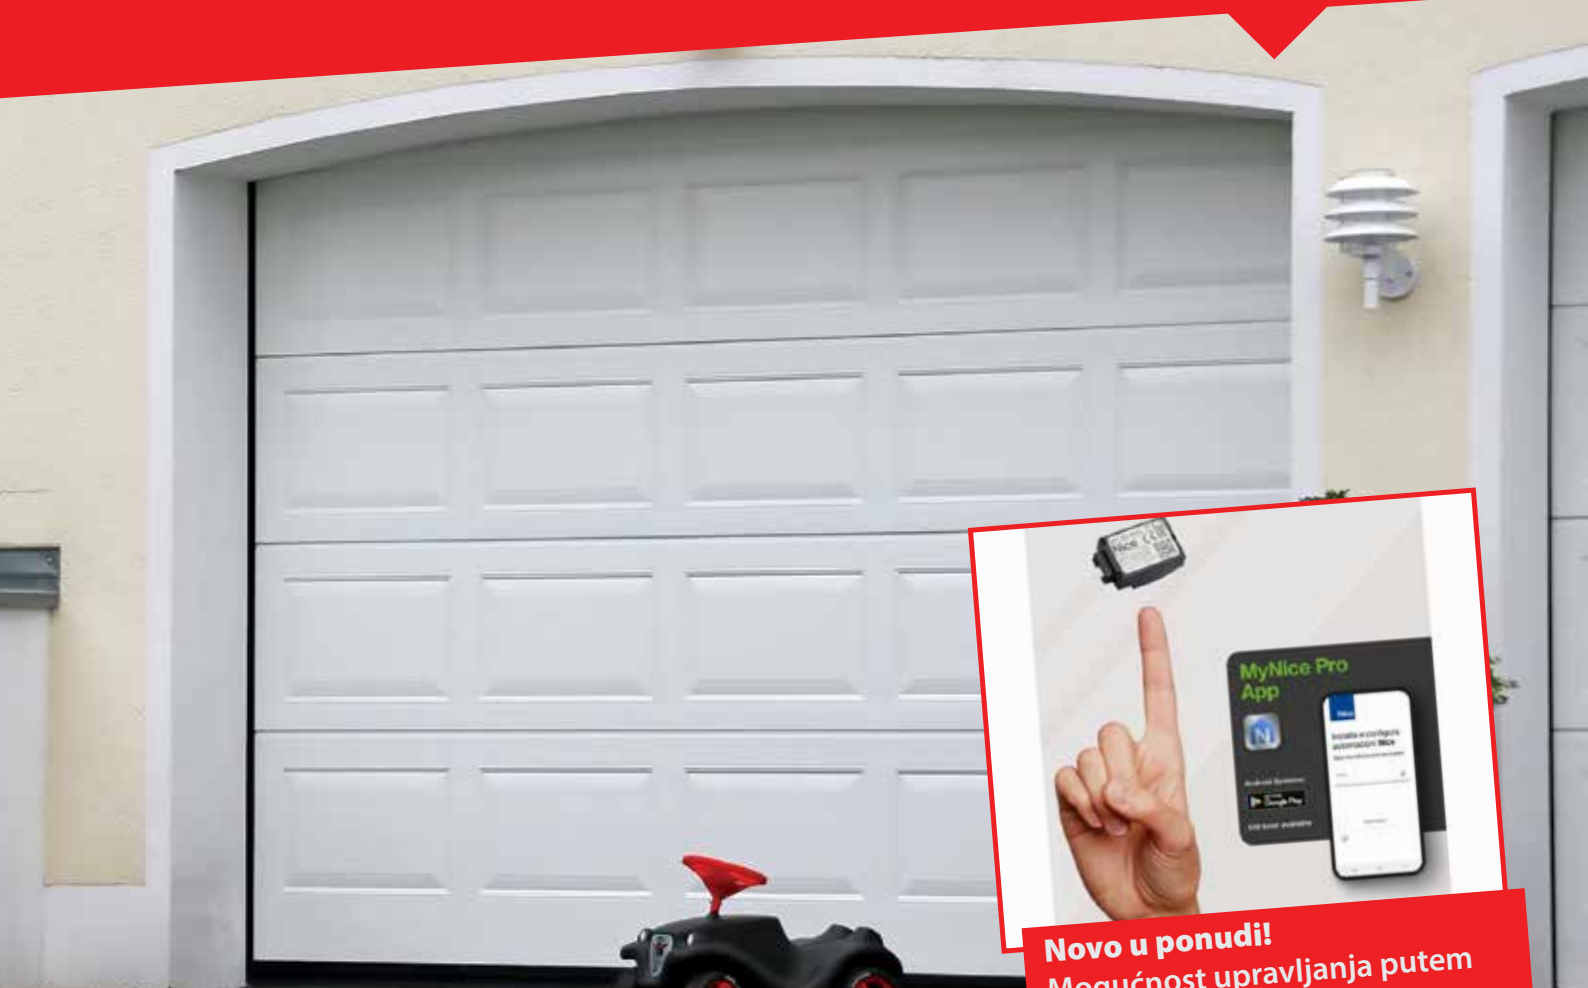

Novo u ponudi!
Mogućnost upravljanja putem mobilne aplikacije

Motori za garažna sekciona vrata

Nice



Motor Nice Spido 600

Jačina	550N
Otvaranje	0,14 m/s
Snaga priključka	230V / 50/60 Hz
Snaga motora	200W
Radna temperatura	-20 DO +55°C
Težina	3,3 kg
Dimenzija	225x330x100 mm

Nice



Motor Nice Spin 23

Jačina	650N
Otvaranje	0,20 m/s
Snaga priključka	230V / 50/60 Hz
Snaga motora	270W
Radna temperatura	-20 DO +55°C
Težina	3,6 kg
Dimenzija	311x327x105 mm



Motor Nise

Jačina	800N, 1000N, 1200N
Snaga priključka	220V / 50/60 Hz
Radna temperatura	-20 DO +50°C
Dužina ruke	330 cm, 360 cm, 420 cm, 520 cm

Vanjske boje i završne obrade

Stucco Multi




Stucco C21




Stucco C81




Stucco C17




Stucco RAL 6005




Stucco RAL 5010



Stucco RAL 7016



Stucco RAL 9006




Stucco RAL 3000


Glatka Multi Rib




C21




RAL 9006



RAL 7016



C17



RAL 6005



Više
linija



Više
rebara

Industrijska sekcijaska vrata



Motor Nise IND

Snaga priključka	220V 50 Hz
Jačina	60 Nm
Snaga motora	0,50 kW
Radna temperatura	-20 do +45°C

Motori za industrijska sekciona vrata



Motor Beninca VN.M 20

Snaga priključka	230 V 50/60 Hz
Jačina	130 Nm
Max. površina vrata	35m ²
Težina motora	18,5 kg
Radna temperatura	-20 do +50°C



Motor Beninca VN.MT 40

Snaga priključka	400 V 50/60 Hz
Jačina	180 Nm
Max. površina vrata	40m ²
Težina motora	18,5 kg
Radna temperatura	-20 do +50°C






Motor Nice NDCM

Snaga priključka	230 V 50 Hz
Jačina	70 Nm
Snaga motora	0,37 kW
Težina motora	16,7 kg
Radna temperatura	-20 do +40°C



Motor Nice NDCM

Snaga priključka	400 V 50 Hz
Jačina	100 Nm
Snaga motora	0,37 kW
Težina motora	16,7 kg
Radna temperatura	-20 do +40°C

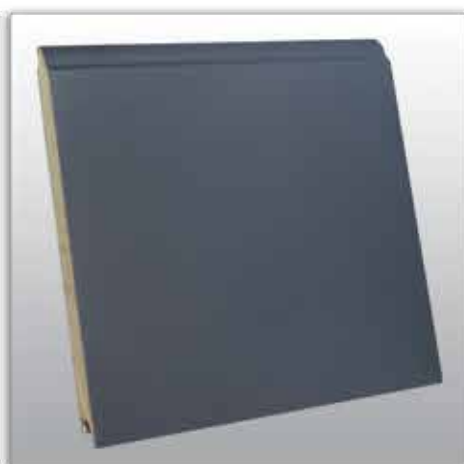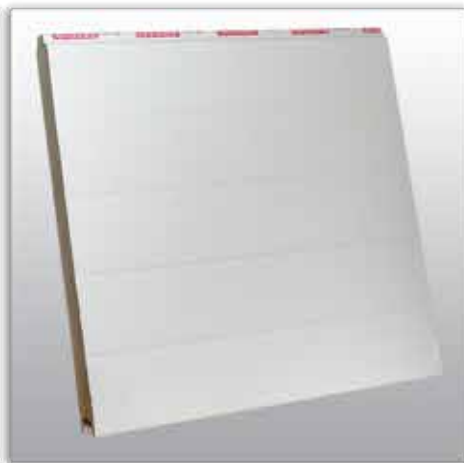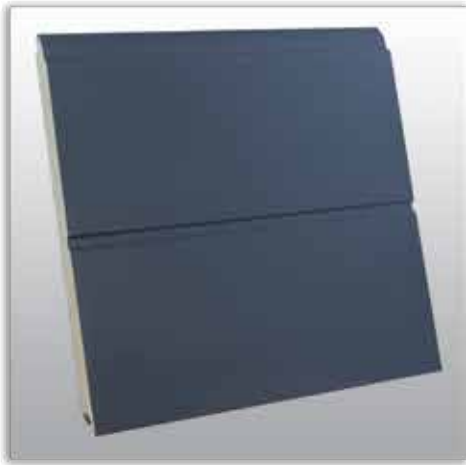

610 mm	Težina panela	5.35 kg/m
	Odstupanje u težini	±5%
	Greben (Standard)	122 mm
	Greben (K-verzija)	101 mm
	λ mW m°C	<0.022
	K_{Watt} m°C	0.50
	I (ISO 717) Index zvučne izolacije (dB)	25
	40 mm	



Motori za klizne kapije



Motor DEA Livi 600 kg

Snaga priključka	230 / 230 V
Jačina	320W
Snaga motora	340N
Težina motora	11 kg
Radna temperatura	-20 do +55°C

Motor NICE RUN 1500 230V 1500 kg



Snaga priključka	230 / 230 V
Jačina	400W
Snaga motora	1000N
Težina motora	19 kg
Radna temperatura	-20 do +55°C



Motor NICE RDKC40 24V 400 kg



Snaga priključka	230 / 24 V
Jačina	210W
Snaga motora	400N
Težina motora	8 kg
Radna temperatura	-20 do +55°C



Novo u ponudi!
Mogućnost upravljanja putem
mobilne aplikacije

Motor NICE ROX 600 230V 600 kg



Snaga priključka	230 / 230 V
Jačina	300W
Snaga motora	600N
Težina motora	11 kg
Radna temperatura	-20 do +55°C



Motor NICE ROX 1000 230V 1000 kg



Snaga priključka	230 / 230 V
Jačina	350W
Snaga motora	800N
Težina motora	11 kg
Radna temperatura	-20 do +55°C





Motor BENINCA KPONY 230/24V 350 kg

Snaga priključka	230 V 50/60 Hz
Snaga motora	321N
Težina motora	6,8 kg
Radna temperatura	-20 do +50°C



Motor BENINCA BULL 5 230/230V 500 kg

Snaga priključka	230 V 50/60 Hz
Snaga motora	650N
Težina motora	10,6 kg
Radna temperatura	-20 do +55°C

PVC
zupčasta letva 1m




Čelična zupčasta letva
sa distancerima



Motor BENINCA BILL 30



Snaga priključka	230 / 230 Vac
Snaga motora	2800N
Težina motora	5,7 kg
Radna temperatura	-20 do +50°C

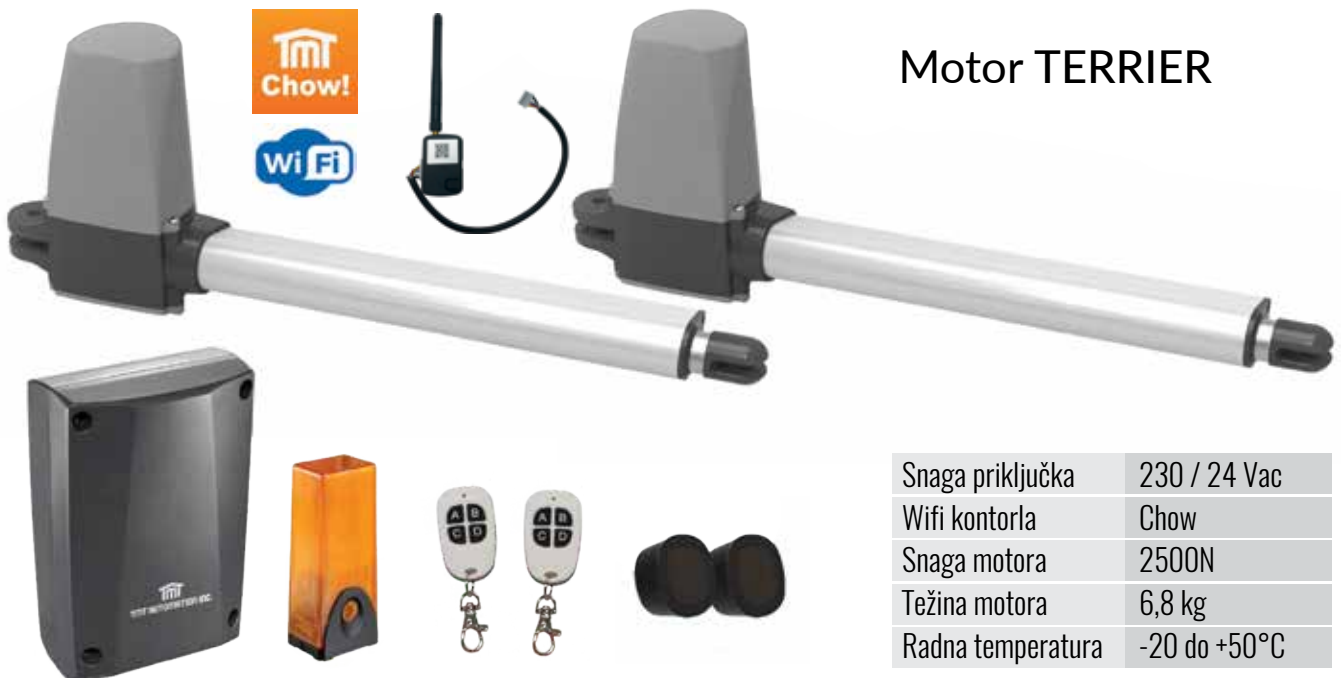

Motor TERRIER

Snaga priključka	230 / 24 Vac
Wifi kontrola	Chow
Snaga motora	2500N
Težina motora	6,8 kg
Radna temperatura	-20 do +50°C



Motori za krilne kapije



Motor DEA Mac L=3m

Snaga priključka	230 / 24V
Jačina	50W
Snaga motora	500N
Težina motora	8,8 kg
Radna temperatura	-20 do +50°C



Motor NICE WINGO4 24V 2 m



Snaga priključka	230 / 24V
Jačina	85W
Snaga motora	1500N
Težina motora	6 kg
Radna temperatura	-20 do +50°C

Motor NICE WINGO5 24V 3,5m



Snaga priključka	230 / 24V
Jačina	85W
Snaga motora	1500N
Težina motora	6 kg
Radna temperatura	-20 do +50°C

Rampe



Rampa WIDES
Letva 4m





Raster sa vertikalnim prečkama



Pješačka vrata
sa niskim pragom

EURO-MIMF

industrijska i garažna vrata

EURO-MIMF d.o.o.
Cerik bb, 76100
Brčko Distrikt BiH



► tel. +387 49 746 280
mob. +387 61 293 794
e-mail: euro-mimf@hotmail.com

Pronađite nas na web stranici



Facebook



www.euro-mimf.ba



www.olx.ba/Sekciona garazna i industrijska vrata X



https://www.facebook.com/euro.mimf



Tim sa najviše ugrađenih garažnih vrata u BiH